

Surface Mount Type **SP-Cap**

Series: **FD, CD, CX, UD, UE**




■ Features

- Low ESR
- Excellent Noise-absorbent Characteristics
- RoHS directive compliant

■ Specifications

Series & Size Code	FD	CD	CX	UD	UE
Category Temp. Range	-40 °C to +105 °C				
Rated W.V.Range	2 V.DC to 12.5 V.DC	2 V.DC to 16 V.DC	2 V.DC to 6.3 V.DC	2 V.DC to 8 V.DC	2 V.DC to 8 V.DC
Nominal Cap.Range	15 μF to 68 μF	2.2 μF to 220 μF	100 μF to 560 μF	68 μF to 470 μF	100 μF to 560 μF
Capacitance Tolerance	±20 %				
DC Leakage Current	Reflow 240 °C : $I \leq 0.06 CV (\mu A)$ 2minutes (2 V.DC to 4 V.DC) $I \leq 0.04 CV$ or $3 (\mu A)$ 2 minutes (6.3 V.DC to 16 V.DC) (Whichever is greater) Reflow 260 °C : $I \leq 0.1 CV (\mu A)$ 2 minutes				
tan δ	≤ 0.06 (120 Hz/+20 °C)			≤ 0.10 (120 Hz/+20 °C)	
Surge Voltage	Rated Working Voltage × 1.25 (15 °C to 35 °C)				
Endurance	After applying rated working voltage for 1000 hours at 105 °C±2 °C, and then being stabilized at +20 °C, capacitor shall meet the following limits.				
	Capacitance change	±10% of initial measured value			
	tan δ	\leq Initial specified value			
	DC leakage current	\leq Initial specified value			
Moisture resistance	After storing for 500 hours at 60 °C, 90 %				
	Capacitance change of initial measured value	2, 2.5 V.DC	4 V.DC	6.3 V.DC	8 V.DC to 16 V.DC
		+70, -20 %	+60, -20 %	+50, -20 %	+40, -20 %
	tan δ	≤ 200 % of initial specified value			
DC leakage current	\leq Initial specified value				

■ Marking

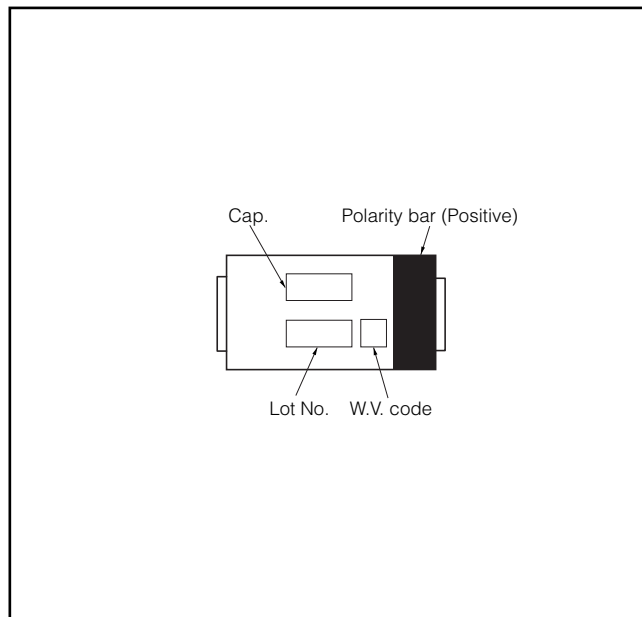

■ Dimensions in mm(not to scale)

(Unit : mm)

Series & Size Code	L±0.2	W1±0.2	W2±0.1	H	P±0.3
FD	7.3	4.3	2.4	1.1±0.1	1.3
CD	7.3	4.3	2.4	1.8±0.1	1.3
CX	7.3	4.3	2.4	1.9±0.2	1.3
UD	7.3	4.3	2.4	2.8±0.2	1.3
UE	7.3	4.3	2.4	4.2±0.1	1.3

* Externals of figure are the reference.

Standard Products

○ : available, — : not available

Series & Size Code	Rated W.V. (V.DC)	Capacitance (±20%) (μF)	Case Size			Specification		Part number	Reflow condition		Min. Packaging Q'ty (pcs)	
			L (mm)	W (mm)	H (mm)	*1 Ripple current (Ar.m.s.)	*2 ESR (mΩ max.)		240 °C *3	260 °C *3		
FD	2	68	7.3	4.3	1.1	2.0	28	EEFFD0D680R *5	○	—	3500	
	2.5	56	7.3	4.3	1.1	2.0	28	EEFFD0E560R *5	○	—	3500	
		39	7.3	4.3	1.1	2.0	28	EEFFD0G390R *5	○	—	3500	
	4	47	7.3	4.3	1.1	2.0	28	EEFFD0G470R *5	○	—	3500	
		6.3	33	7.3	4.3	1.1	2.0	28	EEFFD0J330R *5	○	—	3500
	8	22	7.3	4.3	1.1	2.0	28	EEFFD0K220R *5	○	—	3500	
	12.5	15	7.3	4.3	1.1	1.4	40	EEFFD1B150R *5	○	—	3500	
CD	2	100	7.3	4.3	1.8	2.5	18	EEFCD0D101ER	*4	○	3500	
			7.3	4.3	1.8	2.7	15	EEFCD0D101XE	*4	○	3500	
		120	7.3	4.3	1.8	2.5	18	EEFCD0D121ER	*4	○	3500	
			7.3	4.3	1.8	2.7	15	EEFCD0D121XE	*4	○	3500	
		150	7.3	4.3	1.8	2.5	18	EEFCD0D151ER	*4	○	3500	
			7.3	4.3	1.8	2.5	18	EEFCD0D181ER	*4	○	3500	
	220	7.3	4.3	1.8	2.5	18	EEFCD0D221ER	*4	○	3500		
		7.3	4.3	1.8	2.5	18	EEFCD0E820ER	*4	○	3500		
	2.5	82	7.3	4.3	1.8	2.5	18	EEFCD0E820XE	*4	○	3500	
			7.3	4.3	1.8	2.5	18	EEFCD0E101ER	*4	○	3500	
		100	7.3	4.3	1.8	2.7	15	EEFCD0E101XE	*4	○	3500	
			7.3	4.3	1.8	2.5	18	EEFCD0E121ER	*4	○	3500	
		120	7.3	4.3	1.8	2.5	18	EEFCD0E121XE	*4	○	3500	
			7.3	4.3	1.8	2.5	18	EEFCD0E151ER	*4	○	3500	
	4	56	7.3	4.3	1.8	2.5	18	EEFCD0G560ER	*4	○	3500	
			7.3	4.3	1.8	2.7	15	EEFCD0G560XE	*4	○	3500	
		68	7.3	4.3	1.8	2.5	18	EEFCD0G680ER	*4	○	3500	
			7.3	4.3	1.8	2.7	15	EEFCD0G680XE	*4	○	3500	
		82	7.3	4.3	1.8	2.5	18	EEFCD0G820ER	*4	○	3500	
			7.3	4.3	1.8	2.7	15	EEFCD0G820XE	*4	○	3500	
	6.3	100	7.3	4.3	1.8	2.5	18	EEFCD0G101ER	*4	○	3500	
			7.3	4.3	1.8	1.4	55	EEFCD0J100ER	*4	○	3500	
		22	7.3	4.3	1.8	1.6	40	EEFCD0J220ER	*4	○	3500	
			7.3	4.3	1.8	2.0	28	EEFCD0J330ER	*4	○	3500	
		33	7.3	4.3	1.8	2.5	18	EEFCD0J470ER	*4	○	3500	
			7.3	4.3	1.8	2.7	15	EEFCD0J470XE	*4	○	3500	
	8	68	7.3	4.3	1.8	2.5	18	EEFCD0J680ER	*4	○	3500	
			7.3	4.3	1.8	2.7	15	EEFCD0J680XE	*4	○	3500	
		8.2	7.3	4.3	1.8	1.4	55	EEFCD0K8R2ER	*4	○	3500	
			7.3	4.3	1.8	1.6	40	EEFCD0K150ER	*4	○	3500	
		15	7.3	4.3	1.8	2.0	28	EEFCD0K220ER	*4	○	3500	
			7.3	4.3	1.8	2.5	18	EEFCD0K330ER	*4	○	3500	
	10	47	7.3	4.3	1.8	1.8	25	EEFCD0K470ER	*4	○	3500	
			7.3	4.3	1.8	1.6	30	EEFCD1A220ER	—	○	3500	
		33	7.3	4.3	1.8	1.8	25	EEFCD1A330ER	—	○	3500	
			7.3	4.3	1.8	1.8	25	EEFCD1A390ER	—	○	3500	
		12.5	4.7	7.3	4.3	1.8	1.0	80	EEFCD1B4R7R *5	○	—	3500
			10	7.3	4.3	1.8	1.0	60	EEFCD1B100R *5	○	—	3500
	16	15	7.3	4.3	1.8	1.3	50	EEFCD1B150R *5	○	—	3500	
			7.3	4.3	1.8	1.6	30	EEFCD1B220R *5	○	—	3500	
		2.2	7.3	4.3	1.8	1.0	110	EEFCD1C2R2R *5	○	—	3500	
			4.7	7.3	4.3	1.8	1.0	80	EEFCD1C4R7R *5	○	—	3500
		6.8	7.3	4.3	1.8	1.0	70	EEFCD1C6R8R *5	○	—	3500	
			8.2	7.3	4.3	1.8	1.3	45	EEFCD1C8R2R *5	○	—	3500
	CX	2	220	7.3	4.3	1.9	2.7	15	EEFCX0D221R	—	○	3500
				7.3	4.3	1.9	3.0	12	EEFCX0D271XR	—	○	3500
			330	7.3	4.3	1.9	2.7	15	EEFCX0D331R	—	○	3500
7.3				4.3	1.9	3.0	12	EEFCX0D331XR	—	○	3500	
390			7.3	4.3	1.9	2.7	15	EEFCX0D391R	—	○	3500	
			7.3	4.3	1.9	2.7	15	EEFCX0D471R	—	○	3500	
2.5		560	7.3	4.3	1.9	2.7	15	EEFCX0D561R	—	○	3500	
			7.3	4.3	1.9	2.7	15	EEFCX0E221R	—	○	3500	
		330	7.3	4.3	1.9	2.7	15	EEFCX0E331R	—	○	3500	
			7.3	4.3	1.9	2.7	15	EEFCX0E391R	—	○	3500	
		470	7.3	4.3	1.9	2.7	15	EEFCX0E471R	—	○	3500	
			7.3	4.3	1.9	2.7	15	EEFCX0G151R	—	○	3500	
4		180	7.3	4.3	1.9	2.7	15	EEFCX0G181R	—	○	3500	
			7.3	4.3	1.9	3.0	12	EEFCX0G181XR	—	○	3500	
		220	7.3	4.3	1.9	2.7	15	EEFCX0G221R	—	○	3500	
			7.3	4.3	1.9	3.0	12	EEFCX0G221XR	—	○	3500	
		270	7.3	4.3	1.9	2.7	15	EEFCX0G271R	—	○	3500	
			7.3	4.3	1.9	2.7	15	EEFCX0J101R	—	○	3500	
6.3		100	7.3	4.3	1.9	2.7	15	EEFCX0J101R	—	○	3500	
			7.3	4.3	1.9	2.7	15	EEFCX0J121R	—	○	3500	
		150	7.3	4.3	1.9	2.7	15	EEFCX0J151R	—	○	3500	
			7.3	4.3	1.9	3.0	12	EEFCX0J151XR	—	○	3500	
		180	7.3	4.3	1.9	2.7	15	EEFCX0J181R	—	○	3500	
			7.3	4.3	1.9	2.7	15	EEFCX0J181R	—	○	3500	

*1: Ripple current (100 kHz/ +20 to +105 °C), *2: ESR (100 kHz/+20 °C)

*3: Please refer to the page of "Mounting Specifications".

*4: Please use high temperature Lead-Free reflow (260 °C) for new design.

*5: In the case of new design please contact us.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

Standard Products

○ : available, — : not available

Series & Size Code	Rated W.V. (V.DC)	Capacitance (±20%) (μF)	Case Size			Specification		Part number	Reflow condition		Min. Packaging Qty (pcs)	
			L (mm)	W (mm)	H (mm)	*1 Ripple current (Ar.m.s.)	*2 ESR (mΩ max.)		240 °C *3	260 °C *3		
UD	2	330	7.3	4.3	2.8	3.0	15	EEFUD0D331ER *5	*4	○	2000	
			7.3	4.3	2.8	3.3	12	EEFUD0D331XE *5	*4	○	2000	
			7.3	4.3	2.8	3.4	9	EEFUD0D331LE *5	*4	○	2000	
		390	7.3	4.3	2.8	3.0	15	EEFUD0D391ER *5	*4	○	2000	
			7.3	4.3	2.8	3.4	9	EEFUD0D391LE *5	*4	○	2000	
	470	7.3	4.3	2.8	3.4	9	EEFUD0D471LE *5	*4	○	2000		
	2.5	220	7.3	4.3	2.8	3.0	15	EEFUD0E221ER *5	*4	○	2000	
			7.3	4.3	2.8	3.3	12	EEFUD0E221XE *5	*4	○	2000	
			7.3	4.3	2.8	3.4	9	EEFUD0E221LE *5	*4	○	2000	
		270	7.3	4.3	2.8	3.0	15	EEFUD0E271ER *5	*4	○	2000	
			7.3	4.3	2.8	3.4	9	EEFUD0E271LE *5	*4	○	2000	
	4	120	7.3	4.3	2.8	3.0	15	EEFUD0G121ER *5	*4	○	2000	
			7.3	4.3	2.8	3.4	12	EEFUD0G121XE *5	*4	○	2000	
		150	7.3	4.3	2.8	3.0	15	EEFUD0G151ER *5	*4	○	2000	
			7.3	4.3	2.8	3.3	12	EEFUD0G151XE *5	*4	○	2000	
		180	7.3	4.3	2.8	3.4	9	EEFUD0G151LE *5	*4	○	2000	
			7.3	4.3	2.8	2.5	18	EEFUD0G181ER *5	*4	○	2000	
	6.3	100	7.3	4.3	2.8	3.0	15	EEFUD0J101ER *5	*4	○	2000	
			7.3	4.3	2.8	3.3	12	EEFUD0J101XE *5	*4	○	2000	
		120	7.3	4.3	2.8	3.0	15	EEFUD0J121ER *5	*4	○	2000	
			7.3	4.3	2.8	3.3	12	EEFUD0J121XE *5	*4	○	2000	
			7.3	4.3	2.8	3.4	9	EEFUD0J121LR *5	○	—	2000	
		150	7.3	4.3	2.8	2.5	18	EEFUD0J151ER *5	*4	○	2000	
			7.3	4.3	2.8	3.4	9	EEFUD0J151LR *5	○	—	2000	
	8	68	7.3	4.3	2.8	3.0	15	EEFUD0K680ER	*4	○	2000	
		100	7.3	4.3	2.8	2.5	18	EEFUD0K101ER	*4	○	2000	
	UE	2	270	7.3	4.3	4.2	3.3	12	EEFUE0D271ER *5	*4	○	2000
				7.3	4.3	4.2	3.5	10	EEFUE0D271XE *5	*4	○	2000
			330	7.3	4.3	4.2	3.3	12	EEFUE0D331ER *5	*4	○	2000
				7.3	4.3	4.2	3.5	10	EEFUE0D331XE *5	*4	○	2000
390			7.3	4.3	4.2	3.3	12	EEFUE0D391ER *5	*4	○	2000	
			7.3	4.3	4.2	3.5	10	EEFUE0D391XE *5	*4	○	2000	
			7.3	4.3	4.2	3.7	7	EEFUE0D391LE *5	*4	○	2000	
470			7.3	4.3	4.2	3.3	12	EEFUE0D471ER *5	*4	○	2000	
			7.3	4.3	4.2	3.5	10	EEFUE0D471XE *5	*4	○	2000	
			7.3	4.3	4.2	3.7	7	EEFUE0D471LE *5	*4	○	2000	
560			7.3	4.3	4.2	3.3	12	EEFUE0D561ER *5	*4	○	2000	
			7.3	4.3	4.2	3.7	7	EEFUE0D561LE *5	*4	○	2000	
2.5		220	7.3	4.3	4.2	3.3	12	EEFUE0E221ER *5	*4	○	2000	
			7.3	4.3	4.2	3.5	10	EEFUE0E221XE *5	*4	○	2000	
		270	7.3	4.3	4.2	3.3	12	EEFUE0E271ER *5	*4	○	2000	
			7.3	4.3	4.2	3.5	10	EEFUE0E271XE *5	*4	○	2000	
		330	7.3	4.3	4.2	3.3	12	EEFUE0E331ER *5	*4	○	2000	
			7.3	4.3	4.2	3.5	10	EEFUE0E331XE *5	*4	○	2000	
			7.3	4.3	4.2	3.7	7	EEFUE0E331LE *5	*4	○	2000	
		390	7.3	4.3	4.2	3.3	12	EEFUE0E391ER *5	*4	○	2000	
			7.3	4.3	4.2	3.7	7	EEFUE0E391LE *5	*4	○	2000	
		470	7.3	4.3	4.2	3.3	12	EEFUE0E471ER *5	*4	○	2000	
			7.3	4.3	4.2	3.7	7	EEFUE0E471LE *5	*4	○	2000	
		4	180	7.3	4.3	4.2	3.3	12	EEFUE0G181ER *5	*4	○	2000
7.3				4.3	4.2	3.5	10	EEFUE0G181XE *5	*4	○	2000	
220			7.3	4.3	4.2	3.3	12	EEFUE0G221ER *5	*4	○	2000	
			7.3	4.3	4.2	3.5	10	EEFUE0G221XE *5	*4	○	2000	
270			7.3	4.3	4.2	3.7	7	EEFUE0G221LE *5	*4	○	2000	
			7.3	4.3	4.2	3.3	12	EEFUE0G271ER *5	*4	○	2000	
			7.3	4.3	4.2	3.7	7	EEFUE0G271LE *5	*4	○	2000	
330		7.3	4.3	4.2	3.3	12	EEFUE0G331ER	*4	○	2000		
6.3		150	7.3	4.3	4.2	3.3	12	EEFUE0J151ER *5	*4	○	2000	
			7.3	4.3	4.2	3.5	10	EEFUE0J151XE *5	*4	○	2000	
		180	7.3	4.3	4.2	3.3	12	EEFUE0J181ER *5	*4	○	2000	
			7.3	4.3	4.2	3.5	10	EEFUE0J181XE *5	*4	○	2000	
		220	7.3	4.3	4.2	3.7	7	EEFUE0J181LR *5	*5	○	2000	
			7.3	4.3	4.2	3.0	15	EEFUE0J221ER	*4	○	2000	
8		100	7.3	4.3	4.2	3.3	12	EEFUE0J221LR *5	○	—	2000	
		150	7.3	4.3	4.2	3.3	12	EEFUE0K101ER *5	*4	○	2000	
									*4	○	2000	

*1: Ripple current (100 kHz/ +20 to +105 °C), *2: ESR (100 kHz/+20 °C)

*3: Please refer to the page of "Mounting Specifications".

*4: Please use high temperature Lead-Free reflow (260 °C) for new design.

*5: In the case of new design please contact us.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.